

15" 1024x768 Touch Display

- *15" 1024x768 resolution panel*
- *High contrast ratio 2000:1*
- *10-point touch display*
- *0~40 °C operating temperature*
- *Dual signal interface with HDMI and VGA*
- *Application: POS, Medical*




Preliminary Product Specification

LCD Technology	Active matrix TFT Color LCD; 15" diagonal screen size; 300 cd/m2 (typ.) brightness; Contrast ratio 2000:1 Viewing Angle: L/R = 88°, U/D = 88°; Response time: 23ms (typ.); LED life time: 50,000 hrs.
Display Resolution	1024 x 768
Active Display Area (mm)	304.1(H) x 228.1(V)
Frame Rate (Hz)	55~76
Horizontal Scan (Hz)	31.5K~60K
Vertical Refresh (Hz)	56~75
Dimension (W x H x D) mm	297.5(W) x 190.5(H) x 43.3(D)
Weight (kg)	2.7kg (typ.)
Input Signal	HDMI, VGA
I/O Connectors	HDMI; VGA; Audio-In; USB; 12V DC-In
Power Consumption	Full Model: 20W Sleep mode(DC): 0.5W
Input Rating	12V/3.3A
Environment	Operating Temperature : 0~40°C Storage Temperature : -10~60°C
EMC&Safety	FCC/CE/VCCI/CB/UL/cUL

DP150T01

Appearance

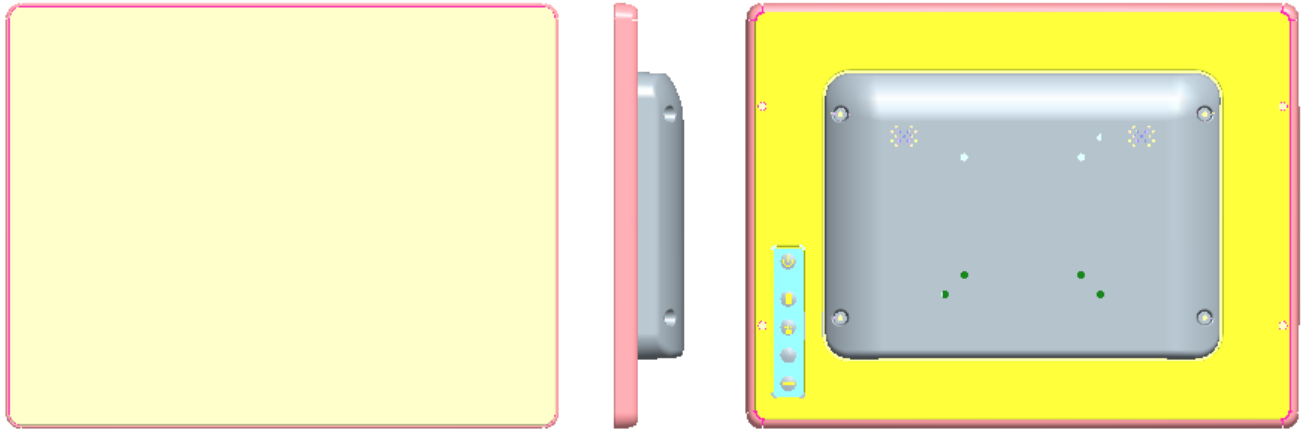

Dimensions

