

## 15.6" FHD Touch Display

- *15.6" 1920x1080 resolution panel*
- *Slim and stylish design*
- *10-point touch display*
- *5~40 °C operating temperature*
- *Dual signal interface with DP and VGA*
- *Low power consumption*
- *Application: POS*




### Preliminary Product Specification

<b>LCD Technology</b>	Active matrix TFT Color LCD; 15.6 " diagonal screen size; 500 cd/m2 (typ.) brightness; Contrast ratio (typ.) 800:1 Viewing Angle: L/R = 80°, U/D = 75°; Response time: 13ms (typ.); LED life time: 50,000 hrs.
<b>Display Resolution</b>	1920 x 1080
<b>Active Display Area (mm)</b>	344.232(W) x 193.536(H)
<b>Frame Rate (Hz)</b>	50~60
<b>Horizontal Scan (Hz)</b>	31.5K~80K
<b>Vertical Refresh (Hz)</b>	56~75
<b>Dimension (W x H x D) mm</b>	388(W) x 244 (H) x 40 (D)
<b>Weight(kg)</b>	1.76 ± 0.10(w/o stand)
<b>Input Signal</b>	DP; VGA
<b>I/O Connectors</b>	12USB; DP; VGA; Audio In; 12V DC IN
<b>Power Consumption</b>	24W Max; <0.5W sleep mode; <0.5W off mode;
<b>Input Rating</b>	12V/2A
<b>Environment</b>	Operating Temperature : 5~40°C Storage Temperature : -20~60°C

## Appearance



## Dimensions

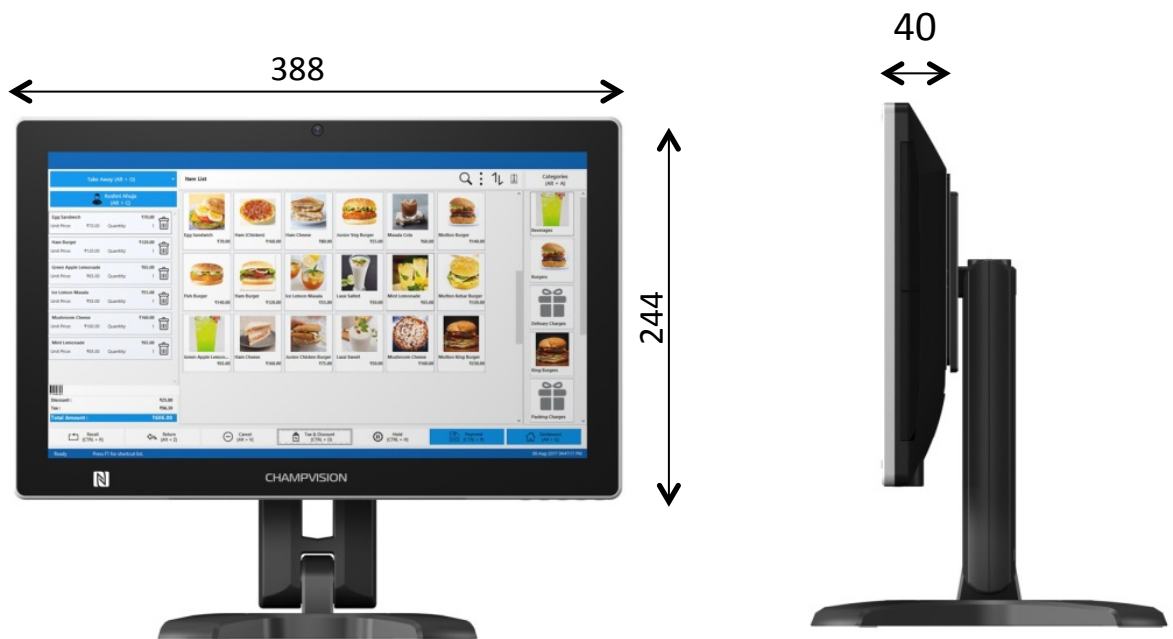

Bezel top & side 21mm  
Bezel bottom 24mm