

DP190G01

19" 1280x1024 Display with Cover Glass

- *19" 1280x1024 resolution panel*
- *Long LED life time 50,000 hrs.*
- *0~40 °C operating temperature*
- *Multiple signal interface with DP, HDMI, and DVI*
- *Low power consumption*
- *Application: Medical*




Preliminary Product Specification

LCD Technology	Active matrix TFT Color LCD; 19" diagonal screen size; 400 cd/m2 (typ.) brightness; Contrast ratio (typ.) 1000:1 Viewing Angle: L/R = 89°, U/D = 89°; Response time: 14ms (typ.); LED life time: 50,000 hrs.
Display Resolution	1280 x 1024 SXGA
Active Display Area (mm)	374.784(H) x 299.827(V)
Frame Rate (Hz)	55~76
Horizontal Scan (Hz)	31.5K~80K
Vertical Refresh (Hz)	56~75
Dimension (W x H x D) mm	416.78(W) x 341.98(H) x 59(D)
Weight (kg)	5.5Kg (typ.)
Input Signal	DVI-I; DP; HDMI
I/O Connectors	DP; HDMI; DVI-I; 12V DC-in
Power Consumption	Full Mode: 25W Sleep Mode: 0.5W Off Mode: 0.5W
Input Rating	12V/3.33A
Environment	Operating Temperature : 0~40°C Storage Temperature : -20~60°C
EMC&Safety	CE/FCC/BSMI/CB/UL

Released date: 2021-02

* Please note the product specifications are subject to change without notice

Appearance

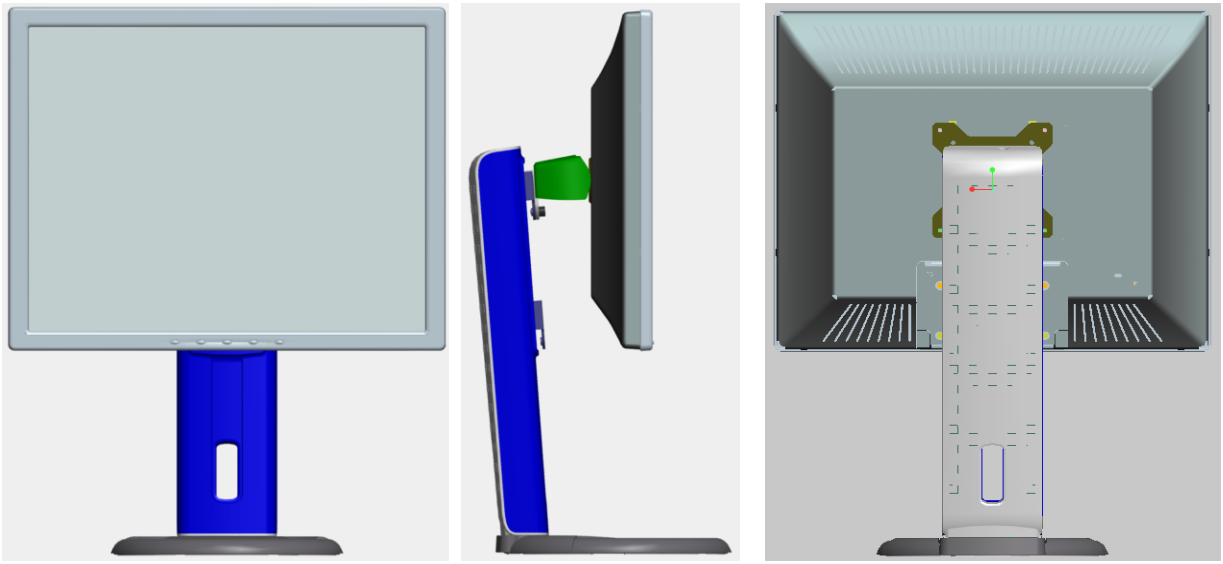

Dimensions

