


## 31.5" FHD Display with Cover Glass


- *31.5" 1920x1080 resolution panel*
- *Long LED life time 50,000 hrs.*
- *High brightness 500 cd/m<sup>2</sup>*
- *High Contrast ratio 3000:1*
- *0~40 °C operating temperature*
- *Multiple signal interface with DP, HDMI, DVI, and VGA*
- *Application: Signage*

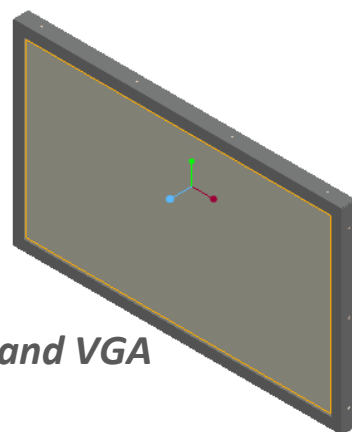

### Preliminary Product Specification

<b>LCD Technology</b>	Active matrix TFT Color LCD; 31.5" diagonal screen size; 500 cd/m <sup>2</sup> (typ.) brightness; Contrast ratio 3000:1 Viewing Angle: L/R = 89°, U/D = 89°; Response time: 8ms (typ.); LED life time: 50,000 hrs.
<b>Display Resolution</b>	1920 x 1080 FHD
<b>Active Display Area (mm)</b>	698.4(H) x 392.85 (V)
<b>Frame Rate (Hz)</b>	60
<b>Horizontal Scan (Hz)</b>	31.5K~91K
<b>Vertical Refresh (Hz)</b>	56~85
<b>Dimension (W x H x D) mm</b>	759(W) x 454.2(H) x 66.6(D)
<b>Weight (kg)</b>	TBC
<b>Input Signal</b>	VGA; DVI; DP; HDMI
<b>I/O Connectors</b>	VGA; DVI; HDMI; DP; RS232; USB; Audio; Power
<b>Power Consumption</b>	Full Mode: 76W Sleep Mode: 4W Off Mode: 1W
<b>Input Rating</b>	AC 100-240V, 50-60Hz
<b>Environment</b>	Operating Temperature : 0~40°C Storage Temperature : -10~60°C
<b>EMC&amp;Safety</b>	FCC/CE/VCCI/RCM/TUV/cTUVus/CB/CCC/ Circular PSE

## Appearance

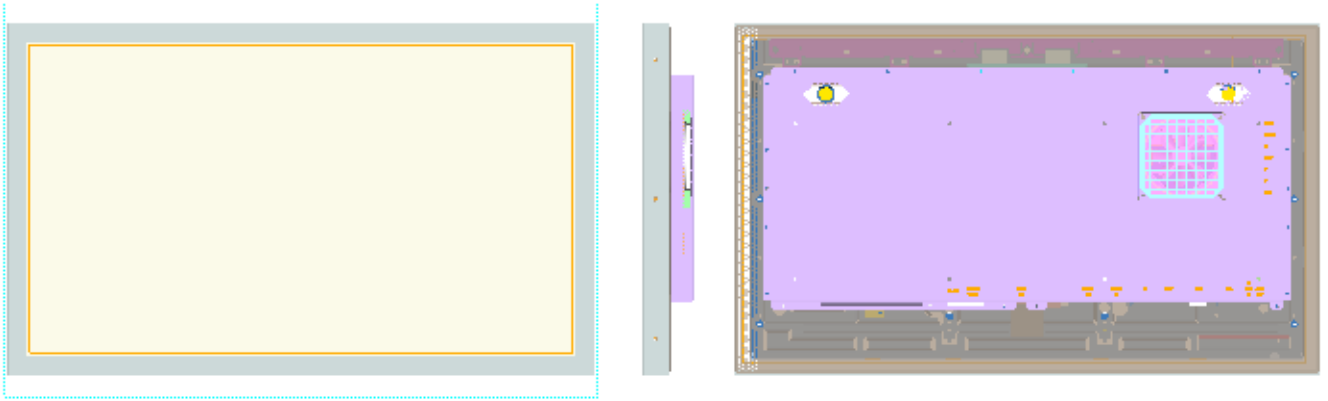

## Dimensions

