DP315G01

31.5” FHD Display with Cover Glass

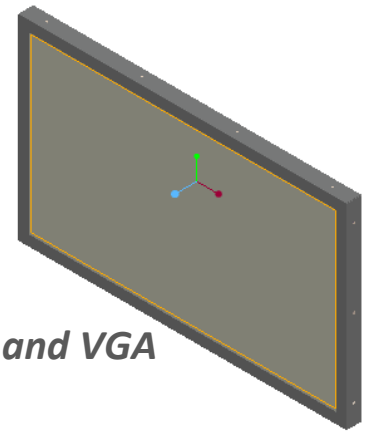

- *31.5” 1920x1080 resolution panel*
- *Long LED life time 50,000 hrs.*
- *High brightness 500 cd/m²*
- *High Contrast ratio 3000:1*
- *0~40 °C operating temperature*
- *Multiple signal interface with DP, HDMI, DVI, and VGA*
- *Application: Signage*

Preliminary Product Specification

LCD Technology	Active matrix TFT Color LCD; 31.5” diagonal screen size; 500 cd/m2 (typ.) brightness; Contrast ratio 3000:1 Viewing Angle: L/R = 89°, U/D = 89°; Response time: 8ms (typ.); LED life time: 50,000 hrs.
Display Resolution	1920 x 1080 FHD
Active Display Area (mm)	698.4(H) x 392.85 (V)
Frame Rate (Hz)	60
Horizontal Scan (Hz)	31.5K~91K
Vertical Refresh (Hz)	56~85
Dimension (W x H x D) mm	759(W) x 454.2(H) x 66.6(D)
Weight （kg)	TBC
Input Signal	VGA; DVI; DP; HDMI
I/O Connectors	VGA; DVI; HDMI; DP; RS232; USB; Audio; Power
Power Consumption	Full Mode: 76W Sleep Mode: 4W Off Mode: 1W
Input Rating	AC 100-240V, 50-60Hz
Enviroment	Operating Temperature : 0~40°C Storage Temperature ： -10~60°C
EMC&Safety	FCC/CE/VCCI/RCM/TUV/cTUVus/CB/CCC/ Circular PSE

* Please note the product specifications are subject to change without notice

DP315G01

Appearance

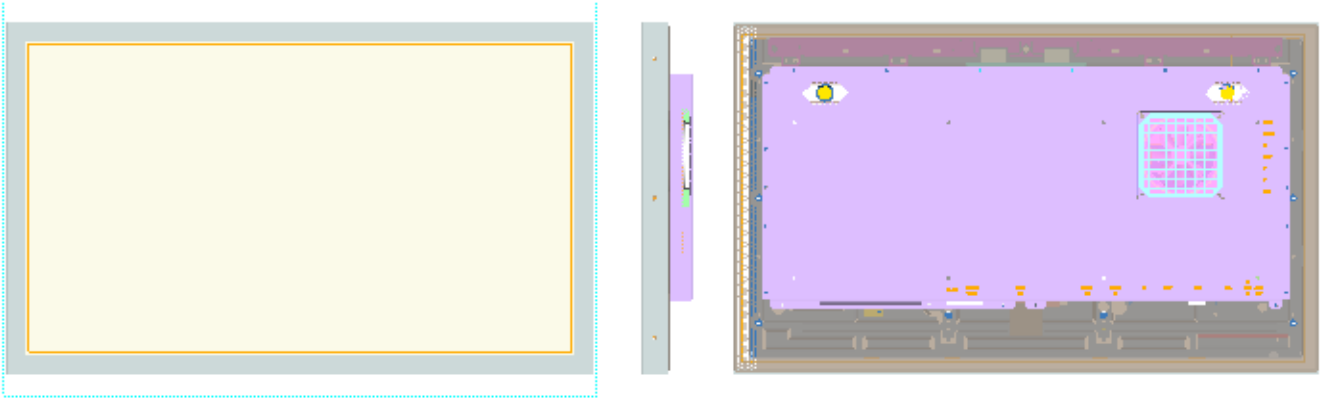
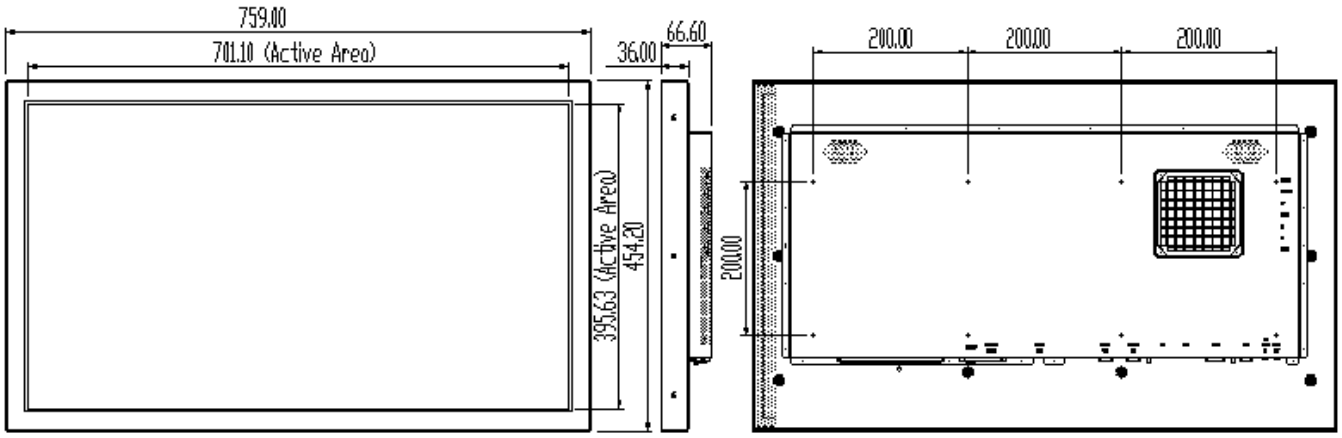
Dimensions