


46" FHD Display with Cover Glass



- 46" 1920x1080 resolution panel
- Long LED life time 50,000 hrs.
- High brightness 700 cd/m²
- High Contrast ratio 4000:1
- 0~40 °C operating temperature
- Multiple signal interface with DP, HDMI, DVI, and VGA
- Application: Signage

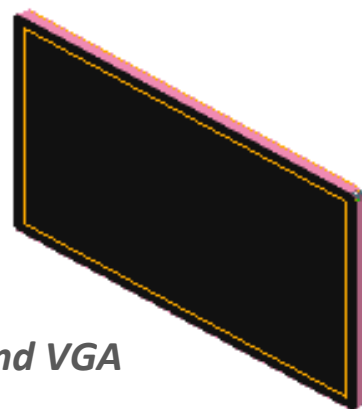

Preliminary Product Specification

LCD Technology	Active matrix TFT Color LCD; 46" diagonal screen size; 700 cd/m ² (typ.) brightness; Contrast ratio 4000:1 Viewing Angle: L/R = 89°, U/D = 89°; Response time: 6.5ms (typ.); LED life time: 50,000 hrs.
Display Resolution	1920 x 1080 FHD
Active Display Area (mm)	1018.08(H) x 572.67(V)
Frame Rate (Hz)	60
Horizontal Scan (Hz)	31.5K~91K
Vertical Refresh (Hz)	56~85
Dimension (W x H x D) mm	1086.6(W) x 638.3(H) x 69.1(D)
Weight (kg)	29.6kg (typ.)
Input Signal	VGA; DVI; DP; HDMI
I/O Connectors	VGA; DVI; HDMI; DP; RS232; USB; Audio; Power
Power Consumption	Full Mode: 110W Sleep Mode: 10W Off Mode: 1W
Input Rating	AC 100-240V, 50-60Hz;
Environment	Operating Temperature : 0~40°C Storage Temperature : -10~60°C
EMC&Safety	FCC/CE/VCCI/cTUVus/CB/TUV/CCC/RCM/EAC/ Circular PSE

Appearance

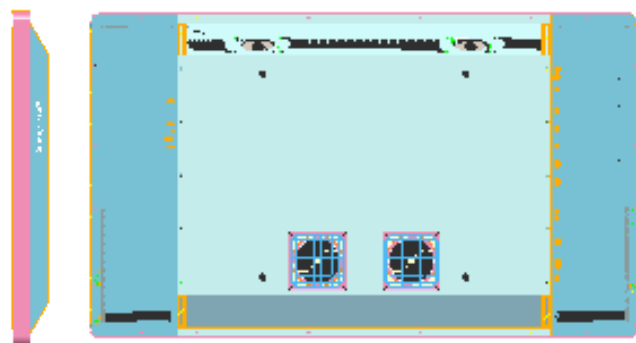

Dimensions

