


55" FHD Display with Cover Glass


- *55" 1920x1080 resolution panel*
- *Long LED life time 50,000 hrs.*
- *High brightness 700 cd/m²*
- *High Contrast ratio 4000:1*
- *0~40 °C operating temperature*
- *Multiple signal interface with DP, HDMI, DVI, and VGA*
- *Application: Signage*

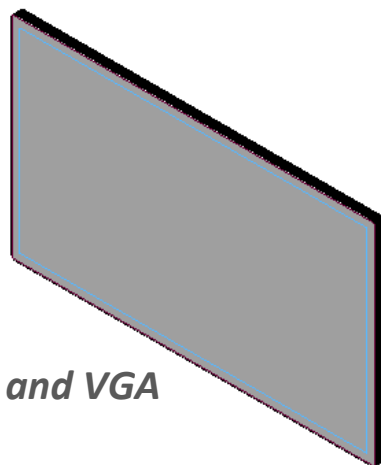

Preliminary Product Specification

LCD Technology	Active matrix TFT Color LCD; 55" diagonal screen size; 700 cd/m ² (typ.) brightness; Contrast ratio 4000:1 Viewing Angle: L/R = 89°, U/D = 89°; Response time: 6.5ms (typ.); LED life time: 50,000 hrs.
Display Resolution	1920 x 1080 FHD
Active Display Area (mm)	1209.6(H) x 680.4(V)
Frame Rate (Hz)	60
Horizontal Scan (Hz)	31.5K~91K
Vertical Refresh (Hz)	56~85
Dimension (W x H x D) mm	1280(W) x 750(H) x 74.4(D)
Weight (kg)	39kg (typ.)
Input Signal	VGA; DVI; DP; HDMI
I/O Connectors	VGA; DVI; HDMI; DP; RS232; USB; Audio; Power
Power Consumption	Full Mode: 150W Sleep Mode: 10W Off Mode: 1W
Input Rating	AC 100-240V, 50-60Hz
Environment	Operating Temperature: 0~40°C Storage Temperature: -10~60°C
EMC&Safety	FCC/CE/VCCI/cTUVus/TUV/CB/CCC/RCM/EAC/ KC/E-standby/Circular PSE

Appearance

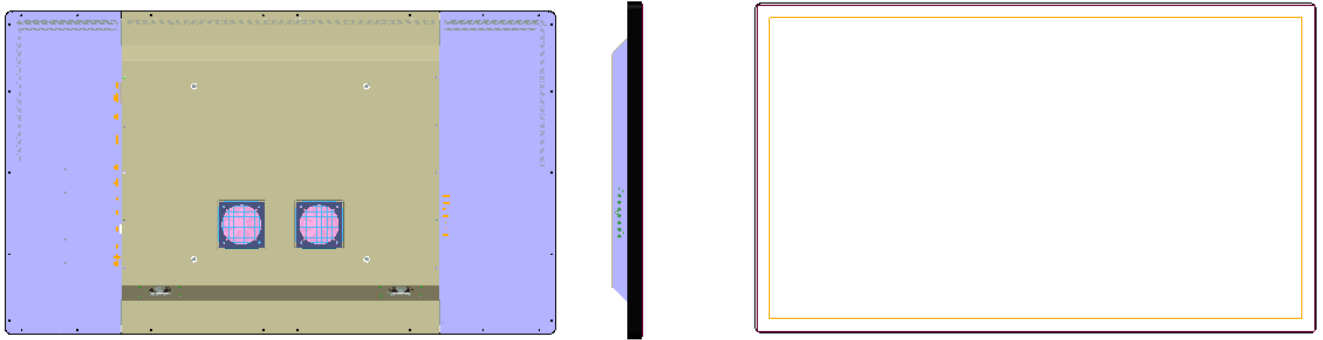

Dimensions

