


10.1 " 1280x800 Open Frame

- *10.1" 1280x800 resolution panel*
- *0~40 °C operating temperature*
- *Dual signal interfaces with HDMI and VGA*
- *Low power consumption*
- *Application: Kiosk*

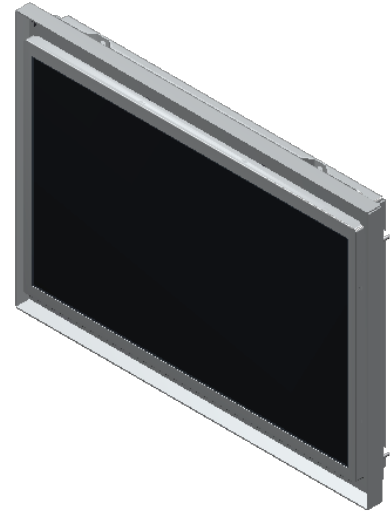

Preliminary Product Specification


| | |
|---------------------------------|---|
| LCD Technology | Active matrix TFT Color LCD; 10.1" diagonal screen size; 350 cd/m2 (typ.) brightness; Contrast ratio (typ.) 800:1 Viewing Angle: L/R = 85°, U/D = 85°; Response time: 25ms (typ.); LED life time: 15,000 hrs. |
| Display Resolution | 1280 x 800 |
| Active Display Area (mm) | 216.96(W) x 135.6(H) |
| Frame Rate (Hz) | 54.7~60 |
| Horizontal Scan (Hz) | 31.5K~49.7K |
| Vertical Refresh (Hz) | 56~60 |
| Dimension (W x H x D) mm | 244.5(W) x 178.42(H) x 39.5(D) |
| Weight(kg) | 1.00 ±0.10 |
| Input Signal | HDMI; VGA |
| I/O Connectors | HDMI; VGA; Audio-In; 12V DC-In |
| Power Consumption | 10.94W Max; <0.5W sleep mode; <0.5W off mode; |
| Input Rating | 12V/0.95A |
| Environment | Operating Temperature : 0~40°C Storage Temperature : -20~60°C |

Released date: 2021-02

* Please note the product specifications are subject to change without notice

OP101N01

Appearance

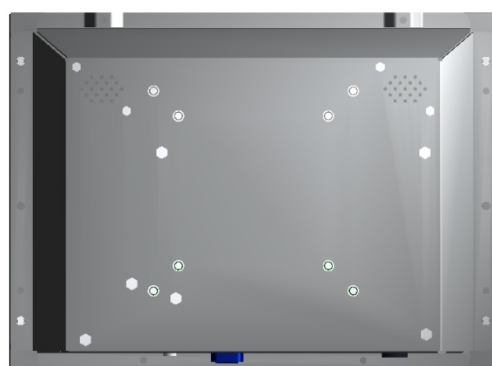

Dimensions

