

OP315HW2

31.5" FHD open frame High Brightness and wide temperature operating support

- *31.5" 1080x1920 resolution panel*
- *High Brightness 2000 cd/m²*
- *-20~50 °C wide operating temperature*
- *Multiple signal interface with HDMI, DVI and RS232 IN*
- *Application: Kiosk, Outdoor*




Preliminary Product Specification

LCD Technology	Active matrix TFT Color LCD;(Portrait) 31.5" diagonal screen size; 2000 cd/m2 (typ.) brightness; Viewing Angle: L/R = 89°, U/D = 89°; Response time: 10ms (typ.); LED life time: 50,000 hrs.
Display Resolution	1080 x 1920
Active Display Area (mm)	392.9(W) x 698.4(H)
Frame Rate (Hz)	60
Horizontal Scan (Hz)	60
Vertical Refresh (Hz)	67.5K
Dimension (W x H x D) mm	479.1(W) x 785.6(H) x 155(D)
Weight(kg)	20.00 ± 0.20
Input Signal	HDMI; DVI; RS232 IN
I/O Connectors	HDMI; DVI; RS232 IN; USB-B
Power Consumption	306W Max; 0.5W sleep mode; 0.5W off mode;
Input Rating	100-240V~, 3.41A, 50-60Hz
Enviroment	Operating Temperature : -20~50°C Storage Temperature : -20~60°C

Released date: 2021-02

* Please note the product specifications are subject to change without notice

Appearance

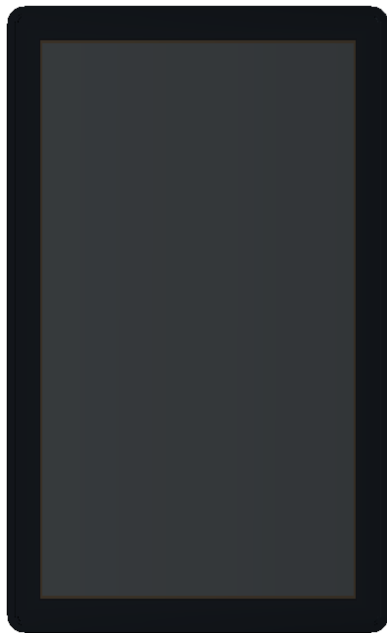

Dimensions

