


## 21.5" FHD Open Frame


- *21.5" 1920x1080 resolution panel*
- *Long LED life time: 50,000 hrs*
- *0~60 °C Wide operating temperature*
- *Dual signal interface with HDMI and VGA*
- *Low power consumption*
- *Application: Kiosk*

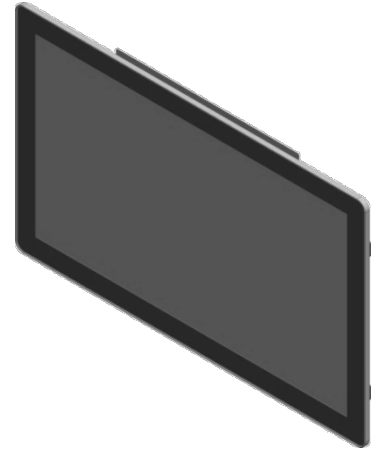

### Preliminary Product Specification

<b>LCD Technology</b>	Active matrix TFT Color LCD; 21.5" diagonal screen size; 350 cd/m2 (typ.) brightness; Contrast ratio (typ.) 1000:1 Viewing Angle: L/R = 89°, U/D = 89°; Response time: 12ms (typ.); LED life time: 50,000 hrs;
<b>Display Resolution</b>	1920 x 1080
<b>Active Display Area (mm)</b>	476.064(W) x 267.786(H)
<b>Frame Rate (Hz)</b>	49~76
<b>Horizontal Scan (Hz)</b>	31.5K~90K
<b>Vertical Refresh (Hz)</b>	56~75
<b>Dimension (W x H x D) mm</b>	537.4(W) x 288(H) x 62.6 (D)
<b>Weight(kg)</b>	4.70±0.10
<b>Input Signal</b>	HDMI; VGA
<b>I/O Connectors</b>	HDMI; VGA; Audio-In; 12V DC-In
<b>Power Consumption</b>	18.82W Max; <0.5W sleep mode; <0.5W off mode;
<b>Input Rating</b>	12V/1.57A
<b>Environment</b>	Operating Temperature : 0~60°C Storage Temperature : -20~60°C

## Appearance

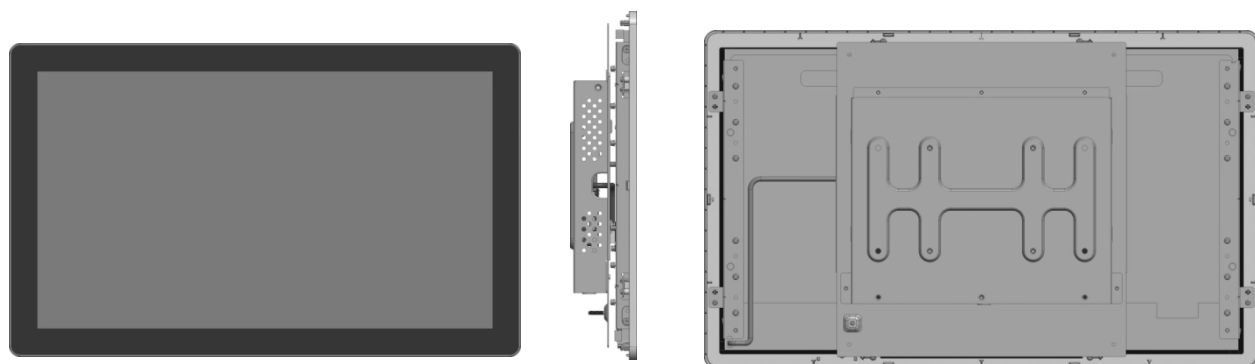

## Dimensions

